

A diver is shown in silhouette against a bright blue underwater background. The diver is equipped with a large video light and an arm system, which are the primary focus of the advertisement. Bubbles are visible around the diver's head and hands.

ADVENTURER

PRODUCT CATALOG 2024

LIGHTING . WET LENS . ARM SYSTEM

UNDERWATER STROBE

Capture professional quality photos with the awesome DS160 strobe. It has lots of great and innovative features which makes it an excellent strobe. It utilizes fully circular flash tube which provides a very powerful (max. 160w) output and a high quality smooth output. The body is built from machined aluminum which makes it durable, robust and can take a beating.

The ergonomics of the strobes is also wonderful. Adjusting settings is also very easy with its large knobs even while wearing thick gloves when diving in cold water. It also shows battery power level and the number of flashes remaining.

@Ken Thongpila



DS160

Strobe & Photo/Video Light



DS160 PRO

Strobe & Photo/Video Light

DS160(PRO) is a underwater ring strobe specifically designed for underwater photographers, boasting a powerful 160Ws output (Guide Number GN32) and an effective beam angle of 120°. Its flash recycling at maximum output takes just one second, it ensures continuous shooting without delay. The built-in high-lumen photography/focusing lamp allows for seamless photo and video shooting. Supporting both 5-pin cable and fiber-optic cable triggering, it is equipped with an OLED display for real-time monitoring of brightness settings, battery level, and number of flashes remaining. With a waterproof rating of up to 150 meters, it handles extreme underwater environments effortlessly.

Specifications

Output / Guide Number	160ws / GN32 (ISO100-1m-full power)	160ws / GN32 (ISO100-1m-full power)
Coverage Angle	120° (With diffuser: 140°)	120° (With diffuser: 140°)
Color Temperature	4800K	4800K
Control	Manual setting in 10 steps	Manual setting in 10 steps
Recycle Time	1.0s (100% battery), 2s (10% battery)	1.0s (100% battery), 2s (10% battery)
Number of flashes	over 600 (full power without LED)	over 600 (full power without LED)
Flash Triggering Method	5pin Sync Cord, Fiber Optic Cable	5pin Sync Cord, Fiber Optic Cable
Video Light	3000 Lumen Video light@5600k CRI=Ra90	7000 Lumen Video light@5600k CRI=Ra90
Modeling Light	200 Lumens Red Light	-
Screen	OLED display	OLED display
Depth Rating	500ft / 150m	500ft / 150m
Color Option:	Black / Silver	Black / Silver
Weight	1250 onland/175g underwater (with Battery)	1250 onland/175g underwater (with Battery)
Dimensions	Diameter Φ100mm x Length 167mm	Diameter Φ100mm x Length 167mm
Included	Strobe Light, Battery, Charger, Ball mount	Strobe Light, Battery, Charger, Ball mount
Optional Accessories	FL-9 Soft diffused, FL-10 Series Ambient Light Filter, LS-01 Light Shade, BH-03 Battery Compartment & BL-8HRL Battery	

Illuminate darkness with vibrant color when you add a video light.
Video Light is the single most important underwater imaging
feature next to your camera.

With X-ADVENTURER's Video Lights, you'll get the brightness, color rendering, temperature, and beam angle to produce amazing magazine quality stills and brilliant underwater video.



Natural Sun-Like Light

The video lights uses a high color rendering index flat panel COB LED array that closely mimics natural sunlight, to solves the issue of color-lacking underwater photos and videos by giving divers the ability to add natural sun-like light.

Easy to use

Dial Control Knob with push-button design allow easy operation with one hand.



Press the button to switch modes
Rotate knob to adjust brightness

Battery level indicator

Colored Status LED for battery and mode indication for easy power management



Auto-Shut-Off mode

Turns the light off for 0.5 second when an external flash is detected. This assures a well lit photo and prevents shadows in your images.

Model: M1000-WRA, M2500-WSRBA, M3000-WRUA, RL3000
M3000-WRUA II, M6000-WRBT II, M8000, M15000 II

Strobe Flash mode

The light is synced from a camera flash via a fibre optic cable and is fast enough to give a powerful pulse of light even for reasonably fast shutter speeds.

Model: M3000-WRUA II, RL3000, M6000-WRBT II, M8000, M15000 II

Turbo mode

The light brightness increased and burn time reduced .

Model: M8000

*Ambient Light Filter (Optional Accessories)

Converts the light into same spectrum as the ambient light under water. This is the perfect solution to avoid mixed light condition when you white balance the camera to ambient light.



RC-02 Controller (Optional Accessories)

The RC-02 is a small controller for the video light, allowing you to adjust two lights at the same time or separate control. Put control of the video lights within thumb's reach. The controller unit can be mounted to the handle systems of your housing or the handles on your tray and arm system.



The RC-02 built-in a sensor, support sets the video light brightness automatically based on ambient brightness.

Support: M2600-WRUA, M2800-WSRU, M3000-WRUA, M3800-WSRU,
M3000-WRUA II, M3500-WSRU, M5000-WSRU, M6000-WRBT,
M6000-WRBT II, M8000, M10000, M15000

Optical Snoot (Optional Accessories)

X-ADVENTURER's optical snoot system is a great tool for underwater photographers. video light snoots provide creative lighting possibilities to create outstanding black background macro snoot photography.



VIDEO LIGHT



M1500-WRA

Smart Focus Photo Light

With 1500 lumens wide light & 200 lumens red light, in addition to the Auto-Shut-Off function, this compact video light is an ideal focus light which helps you to focus your perfect shot easily.



M2500-WSRBA

Smart Focus Dive/Photo Light

With 2500 lumens wide light, 300 lumens snoot light, 200 lumens red light & 6W blue light. Support Auto-Shut-Off function, this video light is an ideal dive light or photo focus light.



RL3000 RPO

Smart Focus Ring Flash Light

RL3000 PRO ring light gives you 1800 lumens white light (3000 lumens in strobe flash mode), also with 100 lumens red light. The light added dimming left & right white light dimming separately function, optimized shooting effect, perfect for super macro images and videos.



M4500-WSRUA

Smart Focus Photo/Video Light

4500 lumens Ra85 CRI White light (Strobe mode & Turbo mode even 6,000 lumens), 200 lumens Red light, 18W UV light. this light is an ideal photo / video light which helps you to focus your perfect shot easily.

Specifications

Wide Light	1500 lumens	2500 lumens	1800 lumens / 3000 lumens (strobe flash)	4500 lumens / 6,000 lumens (strobe flash)
Snoot Light	-	300 Lumens	-	300 Lumens
Red Light	200 lumens	200 lumens	100 lumens	200 lumens
Green/Blue/UV Light	-	6W Blue	-	18W UV
Special Function	Auto-Shut-Off	Auto-Shut-Off	Strobe flash & Left & Right dimming separately	Auto-Shut-Off & Strobe flash
Beam Angle	Flood 100°	Flood 100°	Flood 90°	Flood 110°
Color Temperature	White 5500k	White 5500k	White 5500k	White 5000k @COB LED
Color Rendering Index	CRI=75	CRI=Ra75	CRI=Ra80	CRI=Ra85
Brightness Level	3 levels	3 levels	11 levels	3 levels
Control Methods	Push Button	Tow Buttons	Knob + Button	Tow Buttons
Battery	BL-2H Lithium Ion 3.7V 3400mAh	26650 Lithium Ion 3.7V 5000mAh	21700 Lithium Ion 3.7V 5000mAh	Lithium Ion 11.1V 3400mAh
Burn Time(@100%)	90 minutes	60 minutes	60 minutes	50 minutes
Charger Time	3 hrs	4 hrs	4 hrs	2 hrs
Depth Rating	250M / 820ft	100M / 330ft	60M / 200ft	200M / 600ft
Dimensions	Ø30mm x 132mm	Ø40mm x 133mm	131mm x 159mm x 53mm	Ø52.8mm x 137.8mm
Weight	150g on Land, 86g Underwater	280g on Land, 140g Underwater	285g on Land, 190g Underwater	446g on Land, 208g Underwater
Optional Accessories	SN-06 Snoot System	-	-	RC-02 Controller, FL-2 Filter, SN-04 Snoot
Included	Light, Battery, USB Charger, YS & Ball mount, Lanyard	Light, Battery, USB Charger, YS & Ball mount, Lanyard	Light, Battery, USB Charger, M52 adapter, M67 adapter	Light, Battery, Charger, Carry case, YS&Ball mount



M7000-WRGBU

Smart Focus Photo/Video Light

7000 lumens Ra85 CRI White light (Strobe mode&Turbo mode even 10,000 lumens), 200 lumens Red light, 24W Blue light, 24W Green light and 24W UV light. The light support RGB Mix color mode for different scene effect. this light is an ideal photo/video light which helps you to focus your perfect shot easily.



M5000

Smart Focus Photo/Video Light

M5000 is a professional video light, built-in 5000 lumens Ra85 CRI White light. The light support Turbo Mode and Strobe Mode. Colored Status LED for battery level easy power management. Knob +Push Button easy operation with one hand.



M8000

Smart Focus Photo/Video Light

The light's COB LED delivers a whopping 96 CRI and a TLCI value of 97, with 8000 lumens 130° wide beam angle light, support Strobe flash, Auto-Shut-Off & Turbo mode (Strobe flash mode and Turbo mode even 15000 lumens).



M15000

Smart Focus Photo/Video Light

This is a professional underwater studio video lighting,gives you brightness but also adds color and warmth,all with a smooth, The light's COB LED delivers a whopping 96 CRI and a TLCI value of 97, with 15000 lumens 130° ultra wide beam angle light.

7000 lumens / 10,000 lumens (strobe flash)	5000 lumens / 8500 lumens (Turbo &Strobe)	8000 lumens / 15,000 lumens (Turbo &Strobe)	15000 lumens
-	-	-	-
200 lumens	-	-	-
24W Green, 24W Blue, 24W UV	-	-	-
Auto-Shut-Off & Strobe flash, RGB Mix color mode	Turbo & Strobe flash	Turbo & Strobe flash	Strobe flash
Flood 110°	Flood 130°	Flood 130°	Flood 130°
White 5500k @COB LED	White 5000k @COB LED	White 5600k @COB LED	White 5600k @COB LED
CRI=Ra85	CRI=Ra85	CRI=Ra96, TLCI=97, R9=94	CRI=Ra96, TLCI=97, R9=94
10 levels	10 levels	10 levels	10 levels
Knob + Button	Knob + Button	Knob + Button	Knob + Button
Lithium Ion 14.8V 3400mAh	Lithium Ion 11.1V 3400mAh	Lithium Ion 14.8V 3400mAh	Lithium Ion 14.8V 6800mAh
50 minutes	55 minutes	45 minutes	50 minutes
2 hrs	2 hrs	2 hrs	4 hrs
200M / 660ft	150m / 492ft	100M / 330ft	100M / 330ft
Ø55mm x 131.3mm	Ø67mm x 134mm	Ø73mm x 165mm	Ø73mm x 205mm
585g on Land, 270g Underwater	485(on land) , 210g (underwater)	660g on Land, 300g Underwater	960g on Land, 480g Underwater
RC-02 Controller, FL-4 Filter, SN-05 Snoot	-	RC-02 Controller, FL-5 series Filter	RC-02 Controller, FL-5 series Filter
Light, Battery, Charger, Carry case, YS&Ball mount	Light, Battery, Charger, Carry case, YS&Ball mount	Light, Battery, Charger, Carry case, YS&Ball mount	Light, Battery, Charger, Carry case, YS&Ball mount

PRIMARY LIGHT



T1800

Tech Dive Primary Light

With 1800 lumens spot light, 6 hours burn time is the best choice for tech diving.



T1800S

Side Mount Primary Light

With 1800 lumens spot light, 6 hours burn time is the best choice for side mount tech diving.



TF1800

Tech Dive Primary Light

With 1800 lumens spot light and 5000 lumens flood light, 6 hours burn time, button control design allow easy operation with one hand.



TF1800S

Side Mount Primary Light

With 1800 lumens spot beam and 5000 lumens flood light, 6 hours burn time, button control design allow easy operation with one hand.

Specifications

Spot Light	1800 lumens	1800 lumens	1800 lumens	1800 lumens
Spot Light Angle	6°	6°	6°	6°
Wide Light	-	-	5000 lumens	5000 lumens
Wide Light Angle	-	-	100°	100°
Color Temperature	6500k	6500k	6500k	6500k
Cord Length	110cm	135cm	110cm	135cm
Brightness Level	4 levels	4 levels	3 levels	3 levels
Burn Time	6 hrs	6 hrs	Spot: 6 hrs/Flood: 2 hrs	Spot: 6 hrs/Flood: 2 hrs
Charger Time	3 hrs	3 hrs	3 hrs	3 hrs
Battery	Lithium Ion 11.1V 6800mAh	Lithium Ion 11.1V 6800mAh	Lithium Ion 11.1V 6800mAh	Lithium Ion 11.1V 6800mAh
Depth Rating	200M	200M	200M	200M
Dimensions	Light: ø52mm x 95mm Battery: ø52mm x 172mm	Light: ø52mm x 95mm Battery: ø52mm x 172mm	Light: ø65mm x 95mm Battery: ø52mm x 172mm	Light: ø65mm x 95mm Battery: ø52mm x 172mm
Weight	1190g	1210g	1270g	1290g



T4000

Tech Dive Primary Light

With 4000 lumens spot light, 3 hours burn time is the best choice for tech diving.



T4000S

Side Mount Primary Light

With 4000 lumens spot light, 3 hours burn time is the best choice for side mount tech diving.



T1800H

Handheld Primary Light

T1800H is a cordless light, offers 1800 lumens spot beam, 3 hours burn time.



TF1800H

Handheld Primary Light

TF1800H is a cordless light, offers 1800 lumens spot beam and 5000 lumens wide beam.



T4000H

Handheld Primary Light

T4000H is a cordless light, offers 4000 lumens spot beam, 2 hours burn time.

4000 lumens	4000 lumens	1800 lumens	1800 lumens	1800 lumens
6°	6°	6°	6°	6°
-	-	-	5000 lumens	-
-	-	-	100°	-
6500k	6500k	6500k	6500k	6500k
110cm	135cm	-	-	-
4 levels	4 levels	4 levels	3 levels	4 levels
4 hrs	4 hrs	3 hrs	Spot: 3 hrs/Flood: 1 hr	2 hrs
3 hrs	3 hrs	2 hrs	2 hrs	2 hrs
Lithium Ion 11.1V 6800mAh	Lithium Ion 11.1V 6800mAh	Lithium Ion 11.1V 3400mAh	Lithium Ion 11.1V 3400mAh	Lithium Ion 11.1V 3400mAh
200M	200M	200M	200M	200M
Light: ø52mm x 95mm Battery: ø52mm x 172mm	Light: ø52mm x 95mm Battery: ø52mm x 172mm	ø52mm x 135mm	ø65mm x 135mm	ø52mm x 135mm
1190g	1210g	500g	580g	500g

DIVE LIGHT

Its compact design make it ideal for any type of diving requiring a good light source as well as travelling where weight matters.



M650 LED Dive Light

Using 3xAAA battery or rechargeable 18650 li-ion battery, the compact light features a 5° angle spot light, 3 power modes (100%, 50%, 25%).

Specifications

Spot Light	350 lumens / 650 lumens
Special Function	SOS Mode
Beam Angle	Spot 10°
Color Temperature	6500k
Brightness Level	3 levels
Control Methods	Push Button
Battery	3xAAA / 18650 Lithium Ion
Burn Time(@100%)	40 minutes / 90 minutes
Charger Time	-
Depth Rating	100M / 330ft
Dimensions	Ø34mm x 133.3mm
Weight	170g on Land, 70g Underwater
Color	Black
Optional Accessories	-
Included	Light, AAA holder, Lanyard, Lithium Shim, Spare Orings



M1500 LED Dive Light

This powerful 1500 lumen LED dive light uses the CREE XM-L3 LED, compact and light weight design, push button easy operation with one hand.



M1800 LED Dive Light

This powerful 1800 lumen LED dive light uses the CREE XHP35.2 LED, compact and light weight design, push button easy operation with one hand.



M3000 LED Dive Light

This powerful 3000 lumen LED dive light uses the CREE XHP70.2 LED, compact and light weight design, push button easy operation with one hand.



M4000 LED Dive Light

This powerful 4000 lumen LED dive light uses the CREE XHP70.2 LED, compact and light weight design, push button easy operation with one hand.

1500 lumens	1800 lumens	3000 lumens	4000 lumens
SOS Mode	SOS Mode	SOS Mode	SOS Mode
Spot 15°	Spot 10°	Spot 12°	Spot 12°
6500k	7000k	6500k	6200k
3 levels	3 levels	3 levels	3 levels
Push Button	Push Button	Push Button	Push Button
18650 Lithium Ion 3.7V 3400mAh	21700 Lithium Ion 3.7V 5000mAh	26650 Lithium Ion 3.7V 5000mAh	2 x 21700 Lithium Ion 3.7V 5000mAh
90 minutes	90 minutes	90 minutes	90 minutes
3 hrs	4 hrs	4 hrs	4 hrs
250M / 820ft	250M / 820ft	200M / 660ft	200M / 660ft
Ø28mm x 136mm	Ø41mm x 165mm	Ø55mm x 161mm	Ø51mm x 242mm
155g on Land, 75g Underwater	195g on Land, 120g Underwater	323g on Land, 165g Underwater	288g on Land, 175g Underwater
Black, Silver, Blue, Red, Pink	Black, Gray, Blue, Red, Pink	Black	Black
MOU-1 YS mount	-	-	-
Light, Battery, Charger, Red Filter Lanyard, Spare Orings	Light, Battery, Charger, Lanyard, Spare Orings	Light, Battery, Charger, Lanyard, Spare Orings	Light, Battery, Charger, Lanyard, Spare Orings

WET WIDE LENS

UWL serial is the highest quality changeable ultra wide angle wet lens, featuring unmatched contrast, overall sharpness, corner sharpness, and clarity. The design is truly full zoom through, allowing zoom to be used as a tool for framing, and removable in water for wide angle shots.



UWL145-M67

Ultra Wide Angle Wet Lens

UWL145-M67 underwater ultra wide angle wetlenses, featuring unmatched contrast, overall sharpness, corner sharpness and clarity. It offers 145° field of view with 24mm lens and M67 mounting type. The lens is perfectly work for SONY Rx100 series, Canon G7X series and OLYMPUS EM series camera.

Specifications

LensConstruction	6 elements and 5 groups (4G1P)
Magnification	0.53X
Competible SensorSize(Upto)	Micro 4/3 system Sensor (18mmX13.5mm) 24mm f/1.4 (35mm Equivalent)
FieldofView Conversation	24mm: 84.1° ⇄ 145° 28mm: 75.4° ⇄ 118.6° 35mm: 63.4° ⇄ 94.7°
DomeLens	Optical Grade Polycarbonate Resin
Glass/Coating	Optical Glass/Multi-Layer BBAR Coating
Material	Aluminum with Type II Anodizing
Mounting	M67 x P0.75 Thread
Dimenation	Ø170 x 104mm
Weight	1430g (Air) / 640g (Underwater)
Depth Rate	60m (200ft)



UWL90-M52 Compact Standard Wide Angle Wet Lens

The lens has standard M52 screw interface, can be installed directly on Olympus Tg4/5/6/7 original housing. The lens focal length perfect support Olympus Tg4/5/6/7 camera, no need to adjust camera focal length to get a 90° wide angle image (no dark corner or visible vignetting).



UWL90-M67 Compact Standard Wide Angle Wet Lens

The lens compatible with most current popular compact cameras, including Sony Rx100 series, Canon G7x series, OLYMPUS EM series. The lens focal length perfect support the camera, no need to adjust camera focal length to get a 90° wide angle image (no dark corner or visible vignetting).



UWL150-M52 Ultra Wide Angle Wet Lens

The lens has standard M52 screw interface, can be installed directly on Olympus Tg4/5/6/7 original housing. The lens focal length perfect support Olympus Tg4/5/6/7 camera, no need to adjust camera focal length to get a 150° ultra wide angle image (no dark corner or visible vignetting).



UWL150-M67 Ultra Wide Angle Wet Lens

UWL150-M67 underwater ultra wide angle wetlenses, featuring unmatched contrast, overall sharpness, corner sharpness and clarity. It offers 150° field of view with 24mm lens and M67 mounting type. The lens is perfectly work for SONY Rx100 series and Canon G7X series camera.

2 elements and 2 groups (1G1P)	2 elements and 2 groups (1G1P)	5 elements and 5 groups (4G1P)	5 elements and 5 groups (4G1P)
0.72X	0.72X	0.47X	0.47X
Micro 4/3 system Sensor (17.3mm*13mm) 24mm f/1.4(35mm Equivalent)	Micro 4/3 system Sensor (17.3mm*13mm) 24mm f/1.4 (35mm Equivalent)	½ inch Sensor (6mm*4.8mm) 24mm f/1.4 (35mm Equivalent)	1 inch Sensor (13.2mm*8.8mm) 24mm f/4 (35mm Equivalent)
24mm: 84.1° ⇄ 21.5mm 90° 28mm: 75.4° ⇄ 25.7mm 80.4° 35mm: 63.4° ⇄ 34.1mm 64.8°	24mm: 84.1° ⇄ 21.5mm 90° 28mm: 75.4° ⇄ 25.7mm 80.4° 35mm: 63.4° ⇄ 34.1mm 64.8°	24mm: 84.1° ⇄ 150° 28mm: 75.4° ⇄ 127° 35mm: 63.4° ⇄ 103.6°	24mm: 84.1° ⇄ 150° 28mm: 75.4° ⇄ 127° 35mm: 63.4° ⇄ 103.6°
Optical Grade Polycarbonate Resin	Optical Grade Polycarbonate Resin	Optical Grade Polycarbonate Resin	Optical Grade Polycarbonate Resin
Optical Glass/Multi-Layer BBAR Coating	Optical Glass/Multi-Layer BBAR Coating	Optical Glass/Multi-Layer BBAR Coating	Optical Glass/Multi-Layer BBAR Coating
Aluminum with Type II Anodizing	Aluminum with Type II Anodizing	Aluminum with Type II Anodizing	Aluminum with Type II Anodizing
M52 x P0.75 Thread	M67 x P0.75 Thread	M52 x P0.75 Thread	M67 x P0.75 Thread
Ø92.8 x 50.6mm	Ø116.8 x 61.8mm	Ø150 x 88mm	Ø150 x 88mm
240g (Air) / 80g (Underwater)	335g (Air) / 40g (Underwater)	690g (Air) / 255g (Underwater)	695g (Air) / 260g (Underwater)
60m (200ft)	60m (200ft)	60m (200ft)	60m (200ft)

SUPER MACRO LENS

The Finest Macro Accessory Lens for Compact and Mirrorless. The lenses are extremely powerful super macro accessory lens optimized for use with fixed lens compact cameras.



UCL12-M67
Super Macro Lens

Specifications

Lens Construction	3 elements and 3 groups
Focusing Range	10mm-65mm
Dioptr	+12 CLOSE-UP (Focal length: 83.33mm)
Magnification	1.8x (General Application)
Competible Sensor Size	Up to 13.2mm x 8.8mm (1" inch Sensor)
Competible Camera Lens	50mm or above (35mm Equivalent)
Glass / Coating	Optical Glass / Multi-Layer BBAR Coating
Material	Aluminum with Type II Anodizing
Mounting	M67 x P0.75 Thread
Dimenation	Ø70 x 45mm
Weight	320g (Air) / 168g (Underwater)
Depth Rate	60m (200ft)



UCL18-M67
Super Macro Lens



UCL6S-M67
Macro Lens



UCL13S-M67
Super Macro Lens



UCL23S-M67
Super Macro Lens

3 elements and 3 groups

30mm-53mm

+18 CLOSE-UP (Focal length: 55.2mm)

3x (General Application)

Up to 18mm x 13.5mm (M4/3 System Sensor)

60mm or above (35mm Equivalent)

Optical Glass / Multi-Layer BBAR Coating

Aluminum with Type II Anodizing

M67 x P0.75 Thread

Ø72 x 32mm

300g (Air) / 125g (Underwater)

60m (200ft)

4 elements and 3 groups

80mm - 160mm

+6 CLOSE-UP (Focal length: 166.67mm)

x1.5 (Area Ratio x2.25)
with 105mm F2.8 Macro Lens

Up to 36mm X 24mm (135mm Full Frame)

60mm-105mm

Optical Glass / Multi-Layer BBAR Coating

Aluminum with Type II Anodizing

M67 x P0.75 Thread

Ø71.9 X 54mm

396.5g (Air) / 215g (Underwater)

60m (200ft)

4 elements and 3 groups

60mm - 85mm

+13 CLOSE-UP (Focal length: 76.92mm)

x2.5 (Area Ratio x6.25)
with 105mm F2.8 Macro Lens

Up to 36mm X 24mm (135mm Full Frame)

60mm-105mm

Optical Glass / Multi-Layer BBAR Coating

Aluminum with Type II Anodizing

M67 x P0.75 Thread

Ø71.6 X 42.4mm

410g (Air) / 280g (Underwater)

60m (200ft)

5 elements and 3 groups

27mm-36mm

+23 CLOSE-UP (Focal length: 43.48mm)

x4.2 (Area Ratio x17.64)
with 105mm F2.8 Macro Lens

Up to 36mm X 24mm (135mm Full Frame)

60mm-105mm

Optical Glass / Multi-Layer BBAR Coating

Aluminum with Type II Anodizing

M67 x P0.75 Thread


Ø71.8X60.3mm

593g (Air) / 379g (Underwater)

60m (200ft)


Trays, Arms, & Mounts

TRAY & GRIP

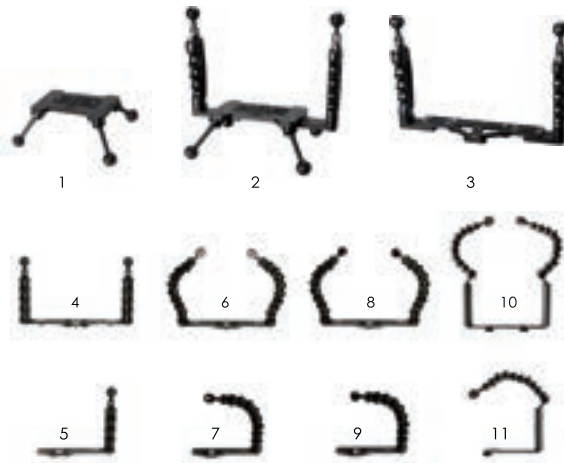


- 1 **TR-08A** Aluminum Quad-pod Bracket for DSLR housing
432g
- 2 **TR-08B** Aluminum Quad-pod dual Handle Bracket Tray
230mm-300mm, 902g
- 3 **TR-06** Aluminum dual grip flexitray with Ball mount
220mm-290mm, 520g
- 4 **TR-03** Aluminum dual grip with Ball mount
195mm-225mm, 480g
- 5 **TR-03S** Single grip with Ball mount
270g
- 6 **TR-04** Dual flexible grip with YS mount
195mm-225mm, 360g
- 7 **TR-04S** Single flexible grip with YS mount
210g
- 8 **TR-05** Dual flexible grip with Ball mount
195mm-225mm, 360g
- 9 **TR-05S** Single flexible grip with Ball mount
210g
- 10 **TR-07** Dual grip with flexible arm & YS mount
195mm, 408g
- 11 **TR-07S** Single grip with flexible arm & YS mount
234g

Arms

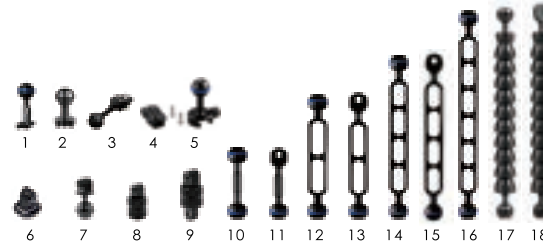


- 1 **GN-EXB** Ball Base Adaptor
- 2 **Z240-BAL** Z240/Z330 Ball Arm
- 3 **BAL-04** 45° Lateral 1" Ball Joint (M6 screw)
- 4 **GN-TPA01M** T-Base adapter
- 5 **GN-TPA01B** Quick Release Ball for T-Base adapter
- 6 **GM-01** 1/4 Screw Gopro mount
- 7 **BTG-01** Gopro Ball Arm
- 8 **RGM-01** 1/4 Screw Rotatable Gopro Mount
- 9 **RGM-02** Rotatable Gopro Mount Adaptor
- 10 **BB-L03** 3" Double Ball Arm
- 11 **BM-L03** 3" YS-Ball Arm
- 12 **BB-L06** 6" Double Ball Arm
- 13 **BM-L06** 6" YS-Ball Arm
- 14 **BB-L09** 9" Double Ball Arm
- 15 **BM-L09** 9" YS-Ball Arm
- 16 **BB-L12** 12" Double Ball Arm
- 17 **BB-F12** 12" Double Ball Flexible Arm
- 18 **BM-F12** 12" YS-Ball Flexible Arm

Float Arms

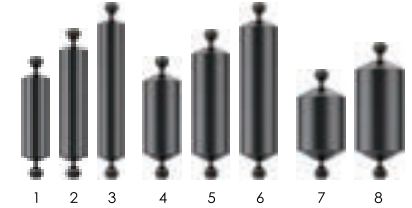

- 1 **FA-50200** Ø50"x200mm aluminum float arm
Buoyancy: 150g, Weight: 179g
- 2 **FA-50250** Ø50"x250mm aluminum float arm
Buoyancy: 200g, Weight: 205g
- 3 **FA-50300** Ø50"x300mm aluminum float arm
Buoyancy: 260g, Weight: 260g
- 4 **FA-70200** Ø70"x200mm aluminum float arm
Buoyancy: 340g, Weight: 220g
- 5 **FA-70250** Ø70"x250mm aluminum float arm
Buoyancy: 465g, Weight: 278g
- 6 **FA-70300** Ø70"x300mm aluminum float arm
Buoyancy: 600g, Weight: 346g
- 7 **FA-90170** Ø90"x170mm aluminum float arm
Buoyancy: 360g, Weight: 210g
- 8 **FA-90220** Ø90"x220mm aluminum float arm
Buoyancy: 610g, Weight: 285g


Hotshoe Arm

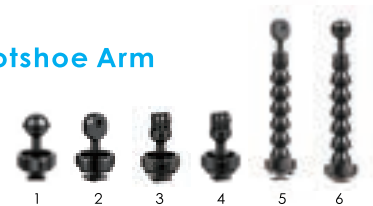

- 1 **EX-HOTS03** Hotshoe Ball Mount Adaptor
- 2 **EX-HOTS04** Hotshoe YS Mount Adaptor
- 3 **EX-HOTS05** Hotshoe Gopro Mount Adaptor
- 4 **EX-HOTS06** Hotshoe Rotatable Gopro Adaptor
- 5 **EX-HOTS01** Hotshoe YS Adaptor flexible arms
- 6 **EX-HOTS07** Hotshoe Ball Adaptor flexible arms

Clamp Sets

- 1 CL-01S Standard Clamp (Silver)
- 2 CL-01 Standard Clamp (Black)
- 3 CL-01R Standard Clamp (Red)
- 4 CL-01P Standard Clamp (Pink)
- 5 CL-01B Standard Clamp (Blue)
- 6 CL-02 Triple Ball Clamp
- 7 CL-03 Long Standard Ball Clamp
- 8 CL-04 Multi-purpose Ball Clamp
- 9 CL-05 Multi-purpose Long Ball Clamp

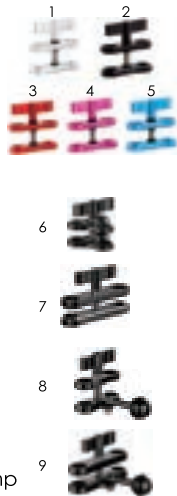

Lenses Accessories

- FH-S67 M67 Lens Flip Holder
- FH-D67 Double M67 Lens Flip Holder
- FH-S52 M52 Lens Flip Holder
- MR-67-AB Quick Release M67 Magic Ring Kit
- M67-M52 67mm-52mm Step-Down Ring
- M52-M67 52mm-67mm Step-UP Ring
- LH-01 52&67mm single lens holder
- LH-02 52&67mm double lens holder
- LADT-01 M52 thread mounting adapter for UCL Series Macro Lens



Action Cameras Accessories

- QP-01 Compact Quik Pod for GoPro
- GF-02 Gopro 9/10/11/12 Filter Kit
- GF-03 DJI OSMO Action 4 Filter Kit
- PH-01 Phone Holder to GoPro Mount
- GM-02 2in1 1/4 Screw+GoPro Mount



Shutter Trigger

- ST-01B Universal Shutter Trigger



Bracket Holder

- 1 BCH-01 TR06/TR08B Bracket Holder & Protection System
- 2 LA-01BK Lanyard 34cm with shackles - Black White
- 3 LA-01BL Lanyard 34cm with shackles - Glue Yellow
- 4 LA-01G Lanyard 34cm with shackles - Green
- 5 LA-01P Lanyard 34cm with shackles - Pink
- 6 LA-01R Lanyard 34cm with shackles - Red



Lanyard

- SR-01R Spring Rope Lanyard - Black
- SR-01G Spring Rope Lanyard - Green
- SR-01O Spring Rope Lanyard - Orange
- SR-01W Spring Rope Lanyard - White
- SR-01R Spring Rope Lanyard - Red
- SR-01C Spring Rope Lanyard - Cyan
- SR-01B Spring Rope Lanyard - Blue
- SR-01P Spring Rope Lanyard - Pink
- SR-02 Mini Retractable Tool Lanyard



ACCESSORIES

Controller

- RC-02** Remote Control
M2600-WRUA, M3000-WRUA, M3500-WSRU,
M3800-WSRU, M5000, M5000-WSRU, M8000,
M6000-WRBT, M7000-WRGBU, M15000



Battery

- BL-2H** 3.7v 3400mAh Battery
M900, M1200, M1500
M1000-WRA, M1500-WRA



- 21700** 3.7v 5000mAh Battery
M1800, M4000, RL3000(PRO), M2000-WRGBUA



- 26650** 3.7v 5000mAh Battery
M2500-WSRBA, M3000



- BL-3H** 11.1v 3400mAh 3-cell Battery Pack
M2600-WRUA, M3000-WRUA, M3500-WSRU,
M4500-WSRUA, T1800H(PRO), T4000H(PRO),
TF1800H



- BL-4HA** 14.4v 3400mAh 4-cell Battery Pack
M6000-WRBT, M7000-WRGBU, M8000



- BL-4HR** 14.4v 3000mAh High-rate Battery
DS160, DS160 PRO



- BL-6HL** 11.1v 6800mAh 6-cell Battery Pack
T1800(S/PRO), T4000(S/PRO), TF1800(S)



- BL-8HL** 14.4v 6800mAh 8-cell Battery Pack
M15000



- BL-8HRL** 14.4v 6000mAh High-rate Battery
DS160, DS160 PRO



Charger

- CH-3** 12.6v 2.8A DC Adapter
M2600-WRUA, M3500-WSRU, M3000-WRUA,
M4500-WSRUA, T1800(H/S/PRO),
T4000(H/S/PRO), TF1800(H/S)



- CH-4** 16.8v 2.8A DC Adapter
M3800-WSRU, M5000-WSRU, M6000-WRBT,
M7000-WRGBU, M8000, M15000



- CH-7** 4.2v 2A USB Charger
M900, M1200, M1500, M1500-WRA, M1800,
M3000, M4000, M2500-WSRBA, RL3000(PRO),
M2000-WRGBU



- CH-9** 4.2v 2A Dual battery USB Charger
M4000



Snoot System

- SN-03** Optical Snoot System
For M5000-WSRU, M3800-WSRU



- SN-04** Optical Snoot System
For M2600-WRUA, M3000-WRUA



- SN-05** Optical Snoot System
For M6000-WRBT, M7000-WRGBU



- SN-06** Optical Snoot System
For M1000-WRA, M1500-WRA



Goodman Handle

- GMH-01** Aluminum Goodman Handle
T1800(H/S/PRO), T4000(H/S/PRO), TF1800(H/S)



- GMH-03** Soft Goodman Handle
Suitable Flashlight from Ø25mm to Ø32mm



- GMH-04** Soft Goodman Handle
Suitable Flashlight from Ø32mm to Ø52mm



Fiber optic cable

- OC-01** Fiber optic cable [Long]



- OC-02** Fiber optic cable [Short]



- OC-03** Short Fiber optic cable
For Olympus PT058, PT059



- OC-04** Dual Long Fiber optic cable
For Olympus PT058, PT059



- OC-05** Dual Long Fiber optic cable



Light Shade

- LS-01** Strobe Light Shade
For DS160, DS160 PRO



Soft Diffused Filter

- FL-6** Soft diffused filter
M1500














- FL-7** Soft diffused filter
M1800






- FL-9** Soft diffused filter
DS160, DS160 PRO



Light Filter

FL-2	Ambient Light Filter M2600-WRUA, M3000-WRUA, M4500-WSRUA	
FL-3	Ambient Light Filter M3800-WSRU, M5000-WSRU	
FL-4 6B	6m Blue Sea Ambient Light Filter M6000-WRBT, M7000-WRGBU	
FL-4 12B	12m Blue Sea Ambient Light Filter M6000-WRBT, M7000-WRGBU	
FL-4 6BG	6m Blue-Green Sea Ambient Light Filter M6000-WRBT, M7000-WRGBU	
FL-5 6B	6m Blue Sea Ambient Light Filter M8000, M15000	
FL-5 12B	12m Blue Sea Ambient Light Filter M8000, M15000	
FL-5 6BG	6m Blue-Green Sea Ambient Light Filter M8000, M15000	
FL-8 6B	6m Blue Sea Ambient Light Filter M5000	
FL-8 12B	12m Blue Sea Ambient Light Filter M5000	
FL-8 6BG	6m Blue-Green Sea Ambient Light Filter M5000	

FL10 6B	6m Blue Sea Ambient Light Filter DS160, DS160 PRO	
FL-10 12B	12m Blue Sea Ambient Light Filter DS160, DS160 PRO	
FL-10 6BG	6m Blue-Green Sea Ambient Light Filter DS160, DS160 PRO	



Email: sales@xadventurer.com

Web: <http://www.xadventurer.com>